


**MATERIALS:**TUBE: NeopreneCOVER: NeopreneREINFORCEMENT: Nylon Tire CordFLANGE: Zinc Plated Steel**NSF 372- LEAD FREE**

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

QTY.	PART NO.	SIZE (in.)	OAL (in.)	W/P (psi)			COMP. (in.)	ELONG. (in.)	LAT. (in.)	ANG (°)	WT (lbs.)
				170°F.	200°F.	220°F.					
	SEMSD-200	2	7	225	150	100	2	1 1/8	1 3/4	40	10
	SEMSD-250	2 1/2	7	225	150	100	2	1 1/8	1 3/4	40	13
	SEMSD-300	3	7	225	150	100	2	1 3/8	1 3/4	40	14
	SEMSD-400	4	9	225	150	100	2	1 3/8	1 1/2	35	15
	SEMSD-500	5	9	225	150	100	2	1 3/8	1 1/2	30	24
	SEMSD-600	6	9	225	150	100	2	1 3/8	1 1/2	30	33
	SEMSD-800	8	13	225	150	100	2 3/8	1 3/8	1 3/8	30	48
	SEMSD-1000	10	13	225	150	100	2 3/8	1 3/8	1 3/8	30	65
	SEMSD-1200	12	13	225	150	100	2 3/8	1 3/8	1 3/8	20	76

CUSTOMER
PROJECT
ENGINEER
ARCHITECT
PRO./PO No.

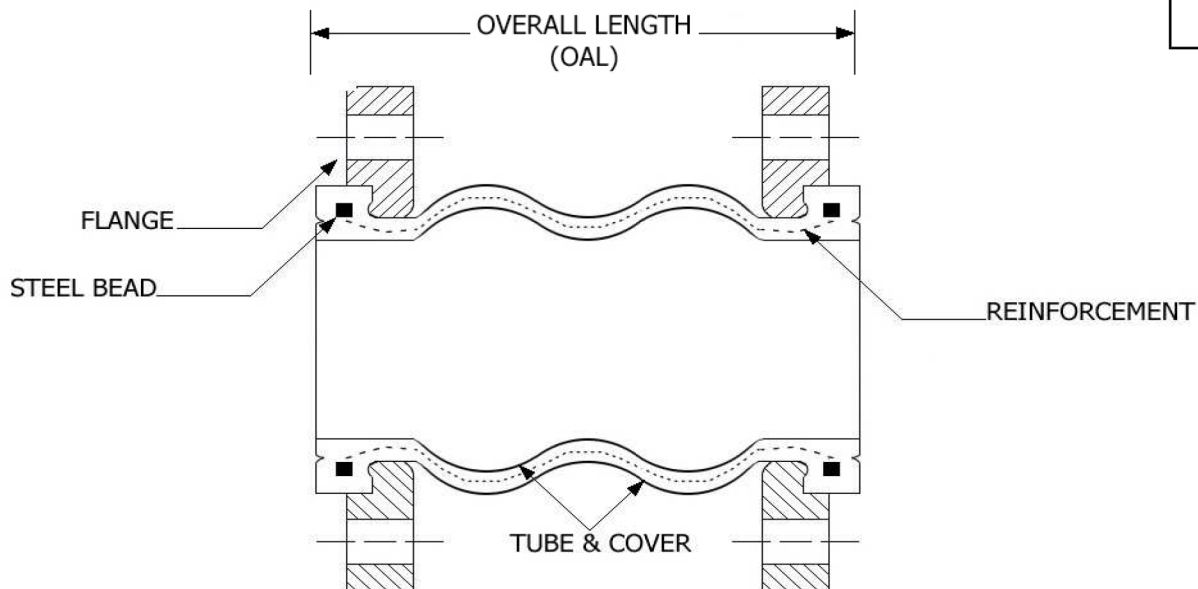

SOUTHEASTERN HOSE, INC.
BREMEN, GA. 30110

**DOUBLE SPHERE RUBBER CONNECTOR
SUBMITTAL DATA**

DESCRIPTION: